



LitePanel 58

Product advantages

- ▶ 100 % homogeneous luminous surface
- ▶ Low installation depth
- ▶ Modern lamp in a timeless design

Features

- ▶ Wide beam without shadows
- ▶ Recessed light with 58 mm installed diameter
- ▶ High light output in relation to size

Ordering information

- ▶ MultiWhite control for setting the colour required
- ▶ When a MultiWhite luminaire is connected directly to an ballast, the light colour is XtraWarmWhite; when using the adapter, the light colour is cool white
- ▶ For a kitchen niche or top floor, use at least 3 lights per meter

LitePanel 58

	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
Stainless steel look	32 359 39	32 359 39	32 359 19	32 359 09
Black	32 359 35	32 359 35	32 359 15	32 359 05

Accessories


Decorative stickers Chrome Glossy (set of 6)	26 074 14
Decorative stickers Gold Chrome (set of 6)	26 074 16
Decorative stickers Gold Metallic (set of 6)	26 074 12
Decorative stickers Brushed Copper (set of 6)	26 074 11
Decorative stickers Silver Chrome (set of 6)	26 074 15
Decorative stickers White Glossy (set of 6)	26 074 13
Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01
M1 extension lead 1800 mm	36 768 01
MultiWhite colour change adapter XW/CW	39 304 40

Technical details




Luminaire type:	Recessed light
Type of lighting:	Functional/ accent lighting
Surface finish:	Black/ Stainless steel look
Operating voltage:	12 Volt DC
Light colour:	NeutralWhite/ WarmWhite/ XtraWarm/ MultiWhite
Colour rendering:	> 80 Ra
Luminous flux:	200 lm
Life span:	40,000 h (L80/B10)
Power consumption:	max. 3.2 W
Dimmable:	PWM
Beam angle:	90°
Half value angle:	60°
Test marks and symbols:	CE
Protection rating:	IP 20
Supply lead:	1800 mm
Plug connector:	Mini connector M1

Light distribution diagram 60° - measured in a black room

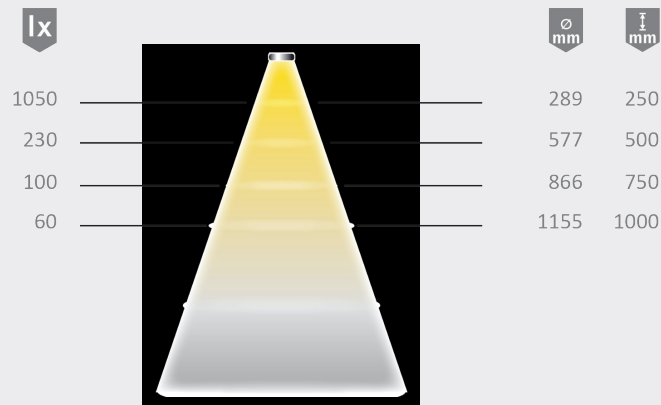

Light box

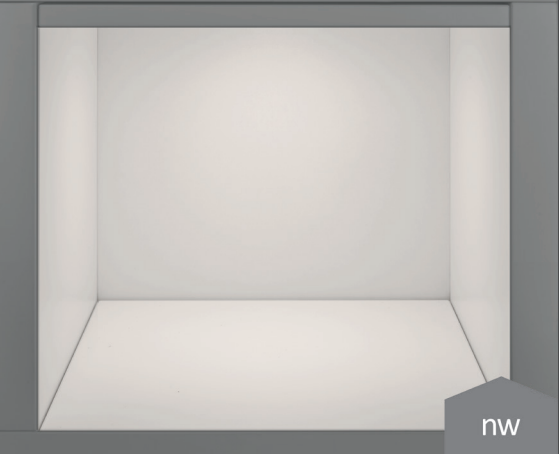

Assembly drawing

