



LitePipe slim

- Product advantages**
- ▶ Activated by motion sensor
 - ▶ Can be individually cut to length
 - ▶ Can be retrofitted into furniture

- Features**
- ▶ Fits in wardrobe rail bearing oval 15x30 mm
 - ▶ Load capacity of up to 40 kg/m
 - ▶ Run-on time approx. 30 seconds

- Application**
- ▶ Wardrobes
 - ▶ Cloakrooms

- Order information**
- ▶ Wardrobe tube bearings are not included in delivery

LitePipe slim

	WarmWhite	NeutralWhite
Aluminium (max. 8.4W) 1192mm	56 030 12	56 030 02
Black (max. 8.4 W) 1192 mm	56 032 12	56 032 02

Accessories


Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 extension lead 1800 mm	36 768 01

Technical details



- | | |
|--------------------------|------------------------------|
| Luminaire type: | Surface mounted light |
| Type of lighting: | Functional lighting |
| Surface finish: | Aluminium/
Black |
| Operating voltage: | 12 Volt DC |
| Light colour: | Neutral White/
Warm White |
| Colour rendering: | > 90 Ra |
| Luminous flux: | 300 lm/m |
| Light source efficiency: | 110 lm/W |
| Life span: | 40,000 h (L80/B10) |
| Power consumption: | max. 7.2 W/m |
| Dimmable: | No |
| Beam angle: | 90° |
| Half value angle: | 60° |
| Test marks and symbols: | CE |
| Protection rating: | IP 20 |
| Supply lead: | 2200 mm |
| Plug connector: | Mini connector M1 |

Light distribution diagram 60° - measured in black room

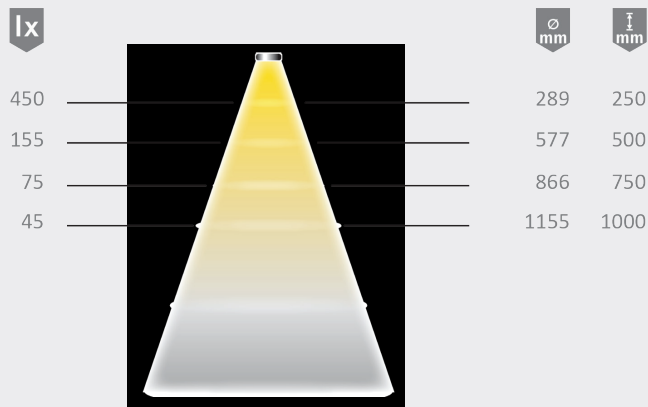

Assembly drawing Can be shortened individually

