



InnoLine

- Product advantages**
- Drawer lighting
 - No dark zones
 - Integrated infrared sensor switch

- Features**
- Can be retrofitted into furniture
 - Can be shortened individually

Application

- Drawers and pull-outs

- Order information**
- When ordering, please specify article number and interior dimensions in mm
 - Order cable duct separately if required
 - MultiWhite control required for colour adjustment

InnoLine

	MultiWhite
200-600mm (max. 2,9 W)	34 230 31
200-900 mm (max. 4,3 W)	34 230 32
200-1200 mm (max. 5,8 W)	34 230 33

Accessories


Basic Control MultiWhite	30 775 01
Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01
M1 extension lead 1800 mm	36 768 01
Cable duct, self-adhesive, 1000 mm, white	36 238 01
MultiWhite colour change adapter XW/CW	39 304 40

Technical details



- | | |
|-------------------------|-----------------------|
| Luminaire type: | Surface mounted light |
| Type of lighting: | Functional lighting |
| Surface finish: | Aluminium |
| Operating voltage: | 12 Volt DC |
| Light colour: | MultiWhite |
| Colour rendering: | > 90 Ra |
| Luminous flux: | 144 lm/m |
| Power consumption: | max. 4.8 W/m |
| Dimmable: | No |
| Half value angle: | 50° |
| Test marks and symbols: | CE |
| Protection rating: | IP 20 |
| Supply lead: | 2500 mm |
| Plug connector: | Mini connector M1 |

Light distribution diagram 50° - measured in black room

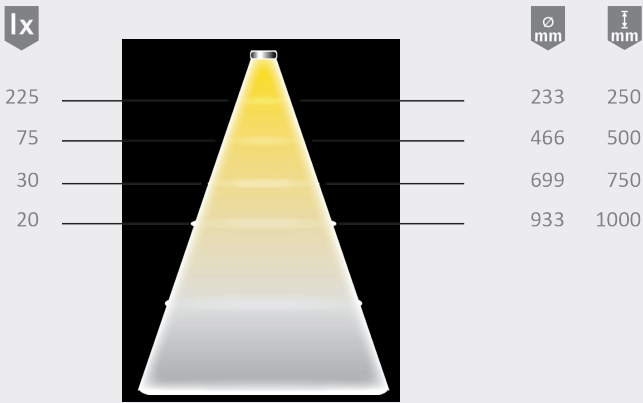

Assembly drawing Can be shortened individually

