



MultiSwitch push button

Product advantages

- Push button with dimming function for drill-hole mounting
- Connection of 1 to 4 identical sensors to 1 master unit

Features

- Soft ON/OFF function (soft start when switching on/off only at 12/24 Volt DC)
- Memory function for power failure
- Dimming function can be switched off

Application

- As push button with and without dimming function
- As on/off switch as well as toggle switch
- Switching and dimming at 12/24 Volt DC
- Switching at 230 Volt AC and Vario

Order information

- Master unit is always required

Technical details



Surface finish: Black
Can be used with: LED lights
Max. switching power: 12 Volt DC-36 W
24 Volt DC-120 W
230 Volt AC-500 W

Test marks and symbols: CE

Master unit supply lead: HV 3000 mm
LV 2000 mm

Switching lead: HV 150 mm
LV 300 mm

Standby: <0.5 W - Master unit including sensors


MultiSwitch push button

Push button for drilling, black	30 153 05
---------------------------------	-----------

Accessories

Master unit 12 Volt DC – 36 W	30 142 01
Master unit 12 Volt DC – 60 W incl. ballast	30 146 01
Master unit 230 Volt AC – 500 W with Euro flat plug	30 141 01
Master unit 24 Volt DC – 120 W	30 143 01
Master unit Vario 12 Volt DC – 36 W	30 144 01
Repeater 12 Volt DC – 36 W	30 263 07
Extension lead sensor cable 3000 mm	36 830 01

Assembly drawing

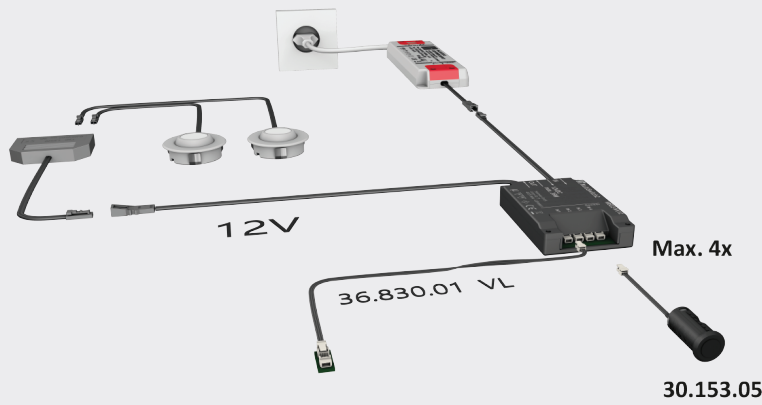

30.153.05

