



MultiSwitch contact

Product advantages

- ▶ Infrared sensor for drill-hole or surface mounting
- ▶ Connection of 1 to 4 identical sensors to 1 master unit

Features

- ▶ Soft ON/OFF function (soft start when switching on/off only at 12/24 Volt DC)
- ▶ Memory function for power failure
- ▶ Not for combination with dimmers

Application

- ▶ Door contact switch
- ▶ Touchless sensor switch (surface-mounted infrared sensor)
- ▶ The switch is perfectly installed in the subfloor above a work surface

Order information

- ▶ Master unit is always required

Technical details



Surface finish: Black / Aluminium look
 For use with: LED lights
 Max. switching power: 12 Volt DC-36 W
 24 Volt DC-120 W
 230 Volt AC-500 W
 Test marks and symbols: CE
 Master unit supply lead: HV 3000 mm
 LV 2000 mm
 Switching lead: HV 150 mm
 LV 300 mm
 Standby: <0.5 W - Master unit including sensors


MultiSwitch contact

Infrared sensor for drilling (IR door contact switch, aluminium look), 8 mm diameter	30 150 51
Infrared sensor for drilling (IR door contact switch, black), 8 mm diameter	30 150 55
Screw-on infrared sensor (IR sensor or door contact switch, black)	30 151 05
Infrared sensor for screwing on (IR sensor or door contact switch, aluminium look)	30 151 01


Accessories

Master unit 12 Volt DC – 36 W	30 142 01
Master unit 12 Volt DC – 60 W incl. ballast	30 146 01
Master unit 230 Volt AC – 500 W with Euro flat plug	30 141 01
Master unit 24 Volt DC – 120 W	30 143 01
Master unit Vario 12 Volt DC – 36 W	30 144 01
Repeater 12 Volt DC – 36 W	30 263 07
Extension lead sensor cable 3000 mm	36 830 01

Assembly drawing

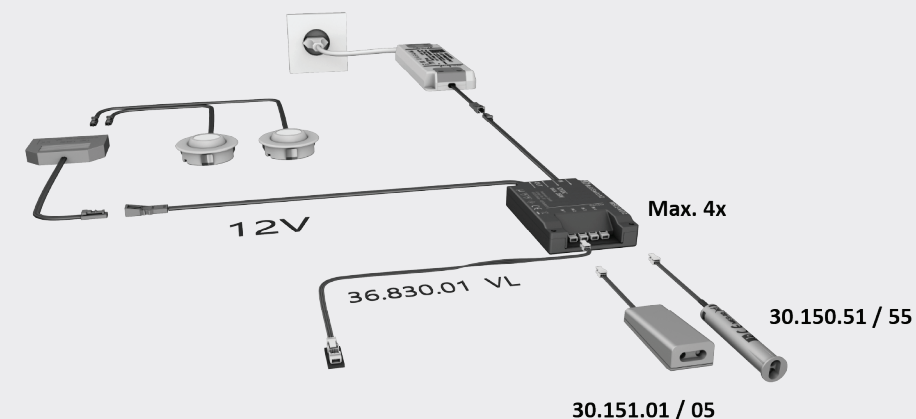

30.150.51 / 30.150.55

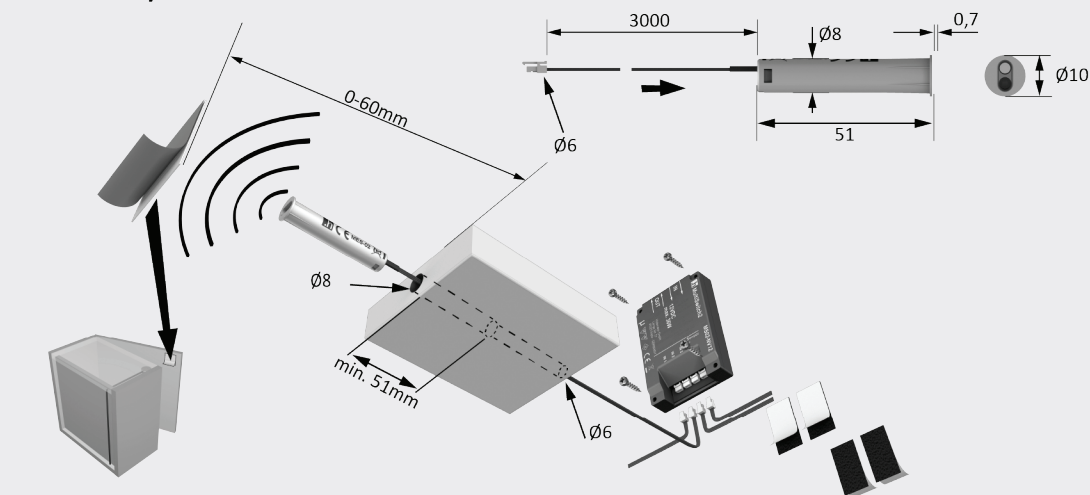

30.151.01 / 30.151.05

