





Light distribution diagram 70° - measured in black room

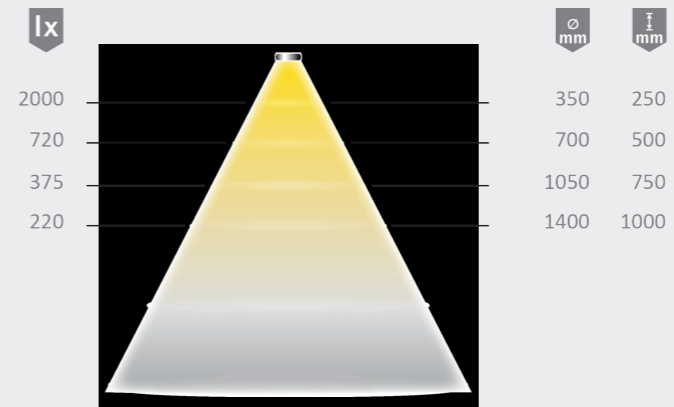

Light box

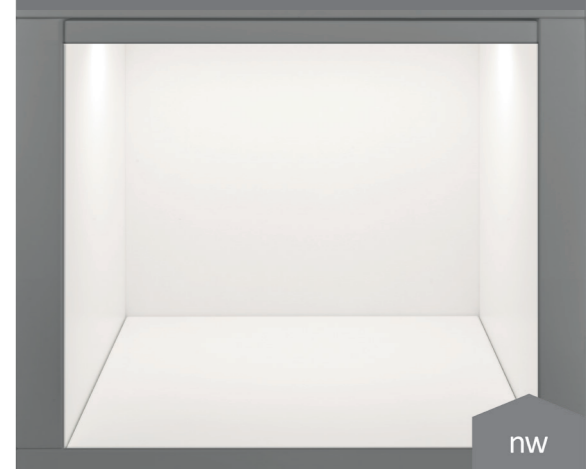

Versa Inside 1200

Product advantages

- ▶ 33% more light than the predecessor Versa Inside 120
- ▶ 33% more efficient than its predecessor
- ▶ Same light distribution as the predecessor

Features

- ▶ Double-side supply lead (one cut, two lights), see drawing
- ▶ 120 LEDs per meter

Application

- ▶ Ideal for task and functional lighting

Order information

- ▶ For the 10 m and 50 m rolls, feeders or soldering leads are required
- ▶ MultiWhite accessories are required for Multi-White light colour

Technical details



12 V

Versa Inside 1200

	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
1200 mm (max. 9.6 W)	56 045 32	56 045 42	56 045 12	56 045 02
3000 mm (max. 24 W)	56 045 33	56 045 43	56 045 13	56 045 03
5000 mm (max. 40 W)	56 045 34	56 045 44	56 045 14	56 045 04
10000 mm (max. 8W/m)	56 045 31	56 045 41	56 045 11	56 045 01
50000 mm (max. 8W/m)	56 045 30	56 045 40	56 045 10	56 045 00

Accessories

	1 piece	10 piece
Feeder 130 mm for sections	36 373 42	
Feeder 1800 mm for sections	36 373 41	
Soldering lead 130 mm for sections	39 297 38	
Soldering lead 1800 mm for sections	36 248 01	
Direct connector	36 373 11	36 373 12
Corner connectors	36 373 01	36 373 02
Flexible connector 150 mm	36 373 31	36 373 32
Flexible connector 50 mm	36 373 21	36 373 22
Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07	
M1 extension lead 1800 mm	36 768 01	
MultiWhite colour change adapter XW/CW	39 304 40	

Luminaire type: Surface mounted light
Type of lighting: Functional lighting
Surface finish: White
Operating voltage: 12 Volt DC
Light colour: NeutralWhite / WarmWhite / MultiWhite / XtraWarm
Colour rendering: > 90 Ra
Luminous flux: 1200 - 1400 lm/m
Light source efficiency: max. 175 lm/W
Life span: 50,000 h (L80/B10)
Power consumption: max. 8 W/m
Max. length at a stretch: 4,5 m
Dimmable: PWM
Beam angle: 120°
Half value angle: 70°
Test marks and symbols: CE
Protection rating: IP 20
Supply lead: 1800 mm
Plug connector: Mini connector M1

Assembly drawing

Can be shortened individually

