





Light distribution diagram 70° - measured in black room

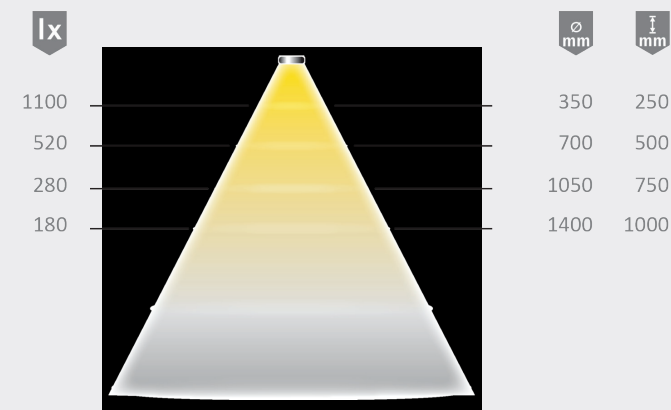

Light box

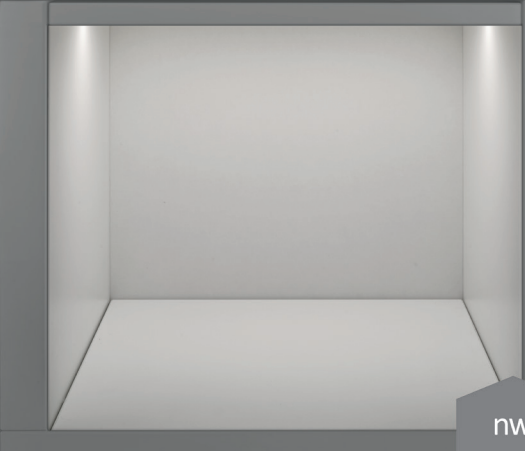

Versa Linear mini

- Product advantages**
- Perfect results even in flat profiles
 - Only 4.5 mm wide for special accents
 - Extremely uniform, homogeneous luminous surface

- Features**
- No light spots visible in the profile due to white coating
 - Double-side supply lead (one cut, two lights), see drawing

- Application**
- Can be used in the Cadro light profile from Hettich
 - Cabinet sides and shelves
- Order information**
- Due to its small size, the use of the soldering lead is only recommended for experienced users

Versa Linear mini

	XtraWarm	WarmWhite	NeutralWhite
3000 mm (max. 18 W)	56 040 43	56 040 13	56 040 03

Accessories

Soldering lead 130 mm for sections	39 297 38
Soldering lead 1800 mm for sections	36 248 01
Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07
M1 extension lead 1800 mm	36 768 01

Technical details



12 V

- | | |
|---------------------------|---------------------------------------|
| Luminaire type: | Surface mounted light |
| Type of lighting: | Accent lighting |
| Surface finish: | White |
| Operating voltage: | 12 Volt DC |
| Light colour: | Neutral White / Warm White / XtraWarm |
| Colour rendering: | > 90 Ra |
| Luminous flux: | 570 - 630 lm/m |
| Light source efficiency: | max. 105 lm/W |
| Life span: | 60,000 h (L80/B10) |
| Power consumption: | max. 6 W/m |
| Max. length at a stretch: | 3 m |
| Dimmable: | PWM |
| Beam angle: | 120° |
| Half value angle: | 70° |
| Test marks and symbols: | CE |
| Protection rating: | IP 20 |
| Supply lead: | 1800 mm |
| Plug connector: | Mini connector M1 |

Assembly drawing

Can be shortened individually

