




Light distribution diagram 70° - measured in black room



Light box

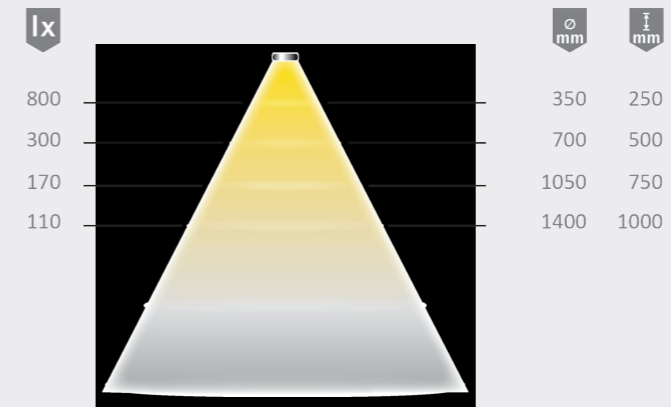

Versa Fix 4x6

Product advantages

- ▶ Flush mounting possible
- ▶ Lateral bending direction (see drawing)
- ▶ Evenly illuminated area
- ▶ Can be individually shortened every 20 mm

Features

- ▶ Double-side supply lead (one cut, two lights), see drawing
- ▶ Suitable for damp rooms

Application

- ▶ Extra narrow cabinet interior lighting
- ▶ Decorative surfaces with visible curves
- ▶ Round counters

Order information

- ▶ Manufacturing tolerances in width must be taken into account when milling
- ▶ MultiWhite accessories are required for MultiWhite light colour

VersaFix 4x6

	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
1200 mm (max. 7.2 W)	56 042 31	56 042 41	56 042 11	56 042 01
3000 mm (max. 18 W)	56 042 33	56 042 43	56 042 13	56 042 03
5000 mm (max. 30 W)	56 042 35	56 042 45	56 042 15	56 042 05

Accessories

Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07
M1 extension lead 1800 mm	36 768 01

Technical details



12 V

Luminaire type:	Recessed light
Type of lighting:	Accent lighting
Surface finish:	White
Operating voltage:	12 Volt DC
Light colour:	NeutralWhite/ WarmWhite/ MultiWhite/ XtraWarm
Colour rendering:	> 80 Ra
Luminous flux:	400 - 450 lm/m
Light source efficiency:	max. 75 lm/W
Life span:	40,000 h (L80/B10)
Power consumption:	max. 6 W/m
Max. length at a stretch:	5 m
Dimmable:	PWM
Beam angle:	120°
Half value angle:	70°
Test marks and symbols:	CE
Protection rating:	IP 65
Supply lead:	1800 mm
Plug connector:	Mini connector M1

Assembly drawing

Can be shortened individually

