




Light distribution diagram 70° - measured in black room



Light box

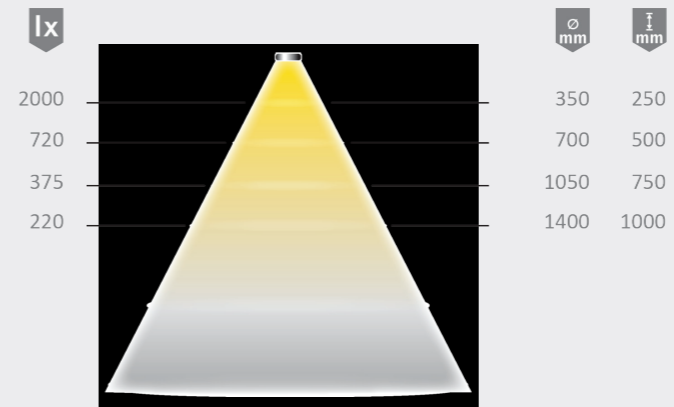

## Versa Inside 1200 24VDC

### Product advantages

- ▶ 40% more efficient than its predecessor Versa Inside 160 (24 Volt DC)

### Features

- ▶ Same brightness and light distribution as the predecessor Versa Inside 160 (24 Volt DC)
- ▶ Supply lead on both sides for the 5000 mm length (one section, two lights), see drawing

### Application

- ▶ Perfect for indirect room lighting

### Order information

- ▶ For the 10 m and 50 m rolls, feeders or soldering leads are required

### Versa Inside 1200 24VDC

	MultiWhite	XtraWarm	WarmWhite	NeutralWhite
5000 mm (max. 40 W)	56 046 34	56 046 44	56 046 14	56 046 04
10000 mm (max. 8 W/m)	56 046 31	56 046 41	56 046 11	56 046 01
50000 mm (max. 8 W/m)	56 046 30	56 046 40	56 046 10	56 046 00

### Accessories

	1 piece	10 piece
Soldering lead 130 mm for sections (max. 150 W)	39 416 02	
Soldering lead 1800 mm for sections (max. 150 W)	39 416 01	
Feeder 1800 mm for sections	36 373 51	
Soldering lead 130 mm for sections (max. 72 W)	36 247 02	
Soldering lead 1800 mm for sections (max. 72 W)	36 247 01	
Direct connector	36 373 11	36 373 12
Corner connectors	36 373 01	36 373 02
Flexible connector 150 mm	36 373 31	36 373 32
Flexible connector 50 mm	36 373 21	36 373 22
Ballast with Euro flat plug (75 W)	31 017 01	
MP2 2-way distributor	39 422 51	
MP2 6-way distributor	36 996 01	
MP2 extension lead 1800 mm	36 177 01	

### Technical details



**Luminaire type:** Surface mounted light  
**Type of lighting:** Functional lighting  
**Surface finish:** White  
**Operating voltage:** 24 Volt DC  
**Light colour:** NeutralWhite / WarmWhite / MultiWhite / XtraWarm  
**Colour rendering:** > 90 Ra  
**Luminous flux:** 1200 lm/m  
**Light source efficiency:** max. 175 lm/W  
**Life span:** 50,000 h (L80/B10)  
**Max. length at a stretch:** 9 m  
**Power consumption:** max. 8 W/m  
**Dimmable:** PWM  
**Beam angle:** 120°  
**Half value angle:** 70°  
**Test marks and symbols:** CE  
**Protection rating:** IP 20  
**Supply lead:** 1800 mm  
**Plug connector:** Mini connector MP2

Assembly drawing Can be shortened individually

