




Light distribution diagram 70° - measured in black room



Light box

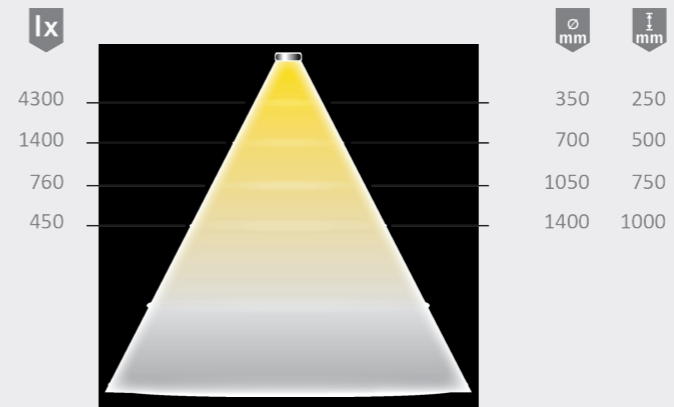

Versa Inside 2100 24VDC

Product advantages

- ▶ 100% more efficient than its predecessor Versa Inside 233 HP

Features

- ▶ Same brightness as the predecessor Versa Inside 233 HP
- ▶ Supply lead on both sides for the 5000 mm length (one section, two lights), see drawing

Application

- ▶ Also suitable for room lighting
- ▶ Luminaire construction for very high light requirements

Order information

- ▶ For the 10 m and 50 m rolls, feeders or soldering leads are required

Technical details



Versa Inside 2100 24VDC

	XtraWarm	WarmWhite	NeutralWhite
5000 mm (max. 70 W)	56 047 44	56 047 14	56 047 04
10000 mm (max. 14 W/m)	56 047 41	56 047 11	56 047 01
50000 mm (max. 14 W/m)	56 047 40	56 047 10	56 047 00

Accessories

	1 piece	10 piece
Soldering lead 130 mm for sections (max. 150 W)	39 416 02	
Soldering lead 1800 mm for sections (max. 150 W)	39 416 01	
Feeder 1800 mm for sections	36 373 51	
Soldering lead 130 mm for sections (max. 72 W)	36 247 02	
Soldering lead 1800 mm for sections (max. 72 W)	36 247 01	
Direct connector	36 373 11	36 373 12
Corner connectors	36 373 01	36 373 02
Flexible connector 150 mm	36 373 31	36 373 32
Flexible connector 50 mm	36 373 21	36 373 22
Ballast with Euro flat plug (75 W)	31 017 01	
MP2 2-way distributor	39 422 51	
MP2 6-way distributor	36 996 01	
MP2 extension lead 1800 mm	36 177 01	

- Luminaire type: Surface mounted light
- Type of lighting: Functional lighting
- Surface finish: White
- Operating voltage: 24 Volt DC
- Light colour: Neutral White / Warm White / XtraWarm
- Colour rendering: > 90 Ra
- Luminous flux: 2100 lm/m
- Light source efficiency: max. 165 lm/W
- Life span: 50,000 h (L80/B10)
- Power consumption: max. 14 W/m
- Max. length at a stretch: 5 m
- Dimmable: PWM
- Beam angle: 120°
- Half value angle: 70°
- Test marks and symbols: CE
- Protection rating: IP 20
- Supply lead: 1800 mm
- Plug connector: Mini connector MP2

Assembly drawing

Can be shortened individually

