



AddLite

Product advantages

- High-quality aluminium profile light
- Integrated cable routing

Features

- Wide beam without shadows
- Can be retrofitted

Application

- Shelves
- Niches
- Showcases

AddLite

	NeutralWhite
Aluminium	34 246 01
Black	34 246 05

Accessories

Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01
M1 extension lead 1800 mm	36 768 01


Technical details




Luminaire type:	Surface mounted light
Type of lighting:	Functional lighting
Surface finish:	Aluminium/ Black
Operating voltage:	12 Volt DC
Light colour:	NeutralWhite
Colour rendering:	> 80 Ra
Luminous flux:	170 lm
Luminaire efficiency:	70 lm/W
Light source efficiency:	90 lm/W
Life span:	40,000 h (L80/B10)
Power consumption:	max. 2.4 W
Dimmable:	PWM
Beam angle:	90°
Half value angle:	60°
Test marks and symbols:	CE
Protection rating:	IP 20
Supply lead:	1800 mm
Plug connector:	Mini connector M1

Spotlights

Light distribution diagram 60° - measured in a black room

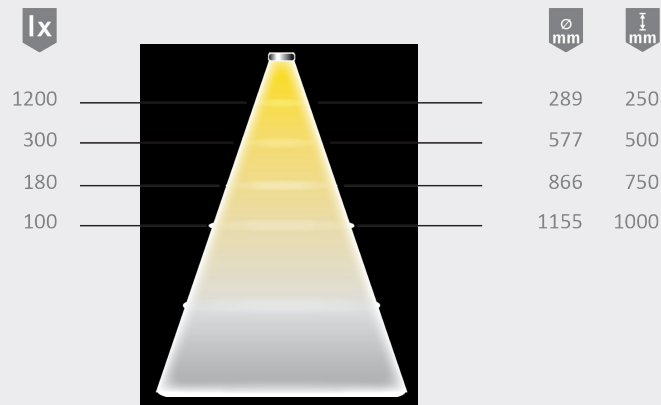

Light box

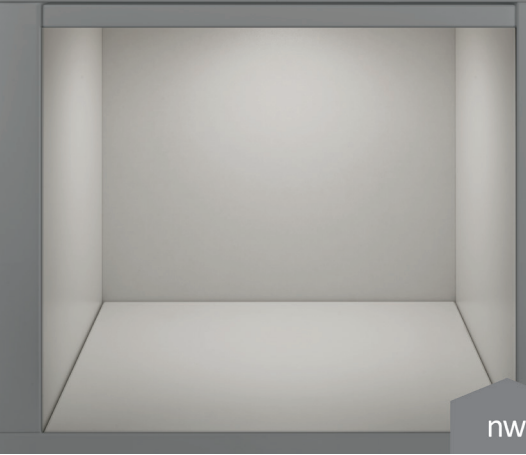

Assembly drawing

