



MultiSwitch PIR

- Product advantages**

 - Motion sensor for surface mounting
 - Responds to heat and movement
 - Connection of 1 to 4 identical sensors to 1 master unit
- Application**

 - Ideal for walk-in wardrobes without fronts
 - Problem solver for furniture in which no magnet or IR sensor can be used
- Features**

 - Soft ON/OFF function (soft start when switching on/off only at 12/24 Volt DC)
 - Memory function for power failure
 - Not for combination with dimmers
- Order information**

 - Master unit is always required


MultiSwitch PIR

Screw-on PIR sensor (motion sensor, black)	30 152 05
PIR sensor for surface mounting (motion sensor)	30 152 01

Accessories

Master unit 12 Volt DC – 36 W	30 142 01
Master unit 12 Volt DC – 60 W incl. ballast	30 146 01
Master unit 230 Volt AC – 500 W with Euro flat plug	30 141 01
Master unit 24 Volt DC – 120 W	30 143 01
Master unit Vario 12 Volt DC – 36 W	30 144 01
Repeater 12 Volt DC – 36 W	30 263 07
Extension lead sensor cable 3000 mm	36 830 01

Technical details

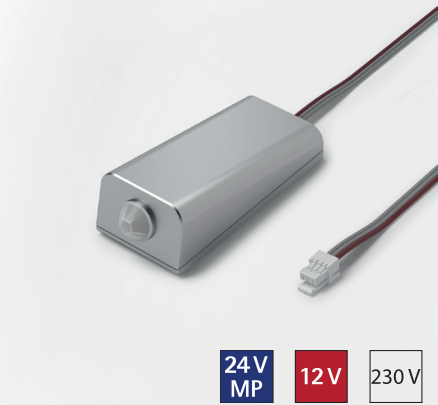

Surface finish: Black / Aluminium look

For use with: LED lights

Max. switching power: 12 Volt DC-36 W
24 Volt DC-120 W
230 Volt AC-500 W

Test marks and symbols: CE

Motion sensor sensing angle: 120°

Range: 2 m


Stay-‘ON’ time: 30 seconds

Master unit supply lead: HV 3000 mm
LV 2000 mm

Switching lead: HV 150 mm
LV 300 mm

Standby: <0.5 W - Master unit including sensors

Assembly drawing

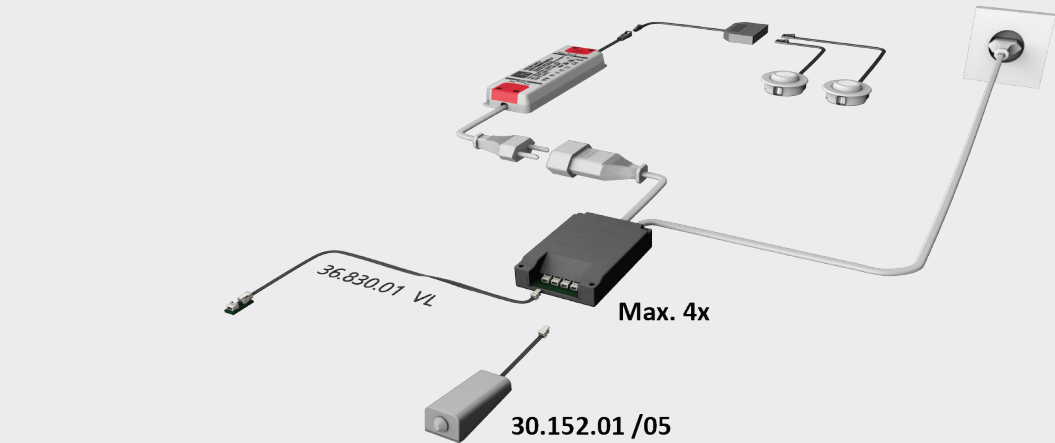

30.152.01 / 30.152.05

