



Versa Fix 8x12

- Product advantages**
- ▶ Evenly illuminated area
  - ▶ Lateral bending direction (see drawing)
  - ▶ Flush mounting possible
  - ▶ Can be individually shortened every 33 mm

- Features**
- ▶ Protection against water jets from all directions (IP 65)
  - ▶ Suitable for damp locations
  - ▶ Double-side supply lead (one cut, two lights), see drawing

VersaFix 8x12

	WarmWhite	NeutralWhite
2500 mm (max. 18.75 W)	56 025 12	56 025 02
5000 mm (max. 37.5 W)	56 025 11	56 025 01

Accessories

Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07
M1 extension lead 1800 mm	36 768 01

- Application**
- ▶ Round counters
  - ▶ Decorative surfaces with visible curves
  - ▶ Extra narrow cabinet interior lighting

- Order information**
- ▶ Packaging unit consists of 1 piece of Versa, 2 end caps and a silicone tube for sealing for damp room applications

Technical details



- Luminaire type:

Type of lighting:

Surface finish:

Operating voltage:

Light colour:
- Recessed light

Accent lighting

White

12 Volt DC

Neutral White/  
Warm White
- Colour rendering:

Luminous flux:

Light source efficiency:

Life span:

Power consumption:
- > 80 Ra

380 - 420 lm/m

max. 56 lm/W

40,000 h (L80/B10)

max. 7.5 W/m
- Max. length at a stretch:

Dimmable:

Beam angle:

Half value angle:

Test marks and symbols:
- 5 m

PWM

120°

70°

CE
- Protection rating:


Supply lead:

Plug connector:
- IP 65


1800 mm

Mini connector M1

Light distribution diagram 70° - measured in black room

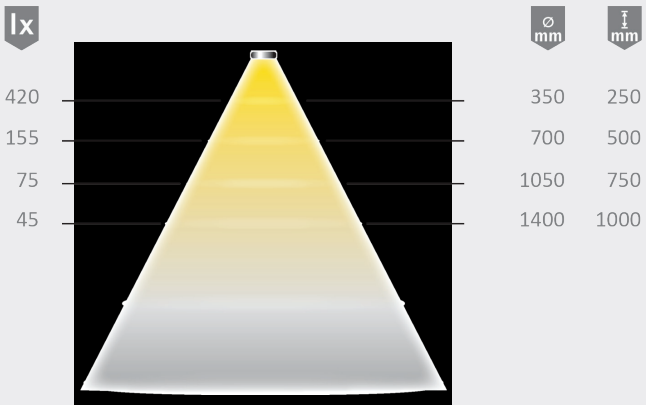

Light box

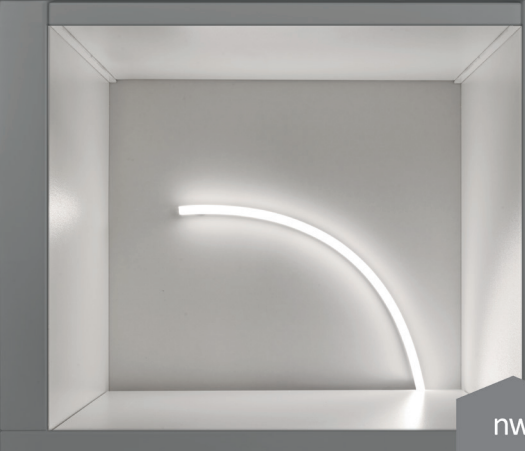

Assembly drawing Can be shortened individually

